


REFLECTIVE INSULATION (Double Layer)

Product Description:

rFOIL™ Reflective Insulation is a double layer of polyethylene bubbles, sandwiched between two highly reflective surfaces. This product has been specifically designed for insulating commercial and residential building assemblies, reducing the amount of radiant heat transfer.

Adding rFOIL™ Reflective Bubble Insulation to your construction project improves the insulation value of the building envelope and significantly increases its energy efficiency. All products in this line are classified as Class 1 / Class A in accordance with the ASTM-E84-09 fire test standard. The product was mounted in accordance to ASTM-E2599-08

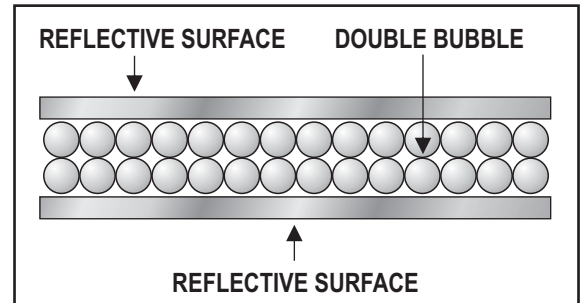

Stock Sizes Available (Rolls):

Size	48" X 125'	72" X 125'	72" X 102'
Part No.	2220-48-125	2220-72-125	2220-72-102

Features:

- Class 1 / Class A Fire Rating
- Unaffected by moisture & controls condensation
- Double bubble provides an effective thermal break
- 96% Reflectivity for optimal thermal performance
- Radiant barrier and vapor barrier all-in-one
- Available in Square Edge or Tab Two format

Applications:

- Crawlspace
- Basement Insulation
- Residential Insulation
- Cathedral Ceiling

Physical Properties	Test	Value
NOMINAL THICKNESS	—	5/16"
FIRE RATING	ASTM E84-09	CLASS 1 / CLASS A
	CAN/ULC-S102-10	FLAME SPREAD = 0 / SMOKE DEVELOPED = 10
FIRE RATING - FULL ROOM BURN	NFPA 286	PASSES
EMISSIVITY	ASTM C1371-04A	0.04
REFLECTIVITY	ASTM E903	0.96
WATER VAPOR PERMEABILITY	ASTM E96	0.02 Perms
RESISTANCE TO FUNGI & BACTERIA	ASTM C1149	DOES NOT PROMOTE GROWTH
PLIABILITY	ASTM C1224-03	NO CRACKING
BLEEDING AND DELAMINATION	ASTM C1224-03	NO BLEEDING OR DELAMINATION
CORROSIVENESS	ASTM D3310-00	PASSES

Verified by



PATENTS

US Patent No.: 8,221,871
US Patent No.: 8,327,601
US Patent No.: 8,343,614

US Patent No.: 7,935,410
US Patent No.: 7,935,411

CDN Patent No.: 2,554,754
CDN Patent No.: 2,591,589



279 Humberline Drive Etobicoke, ON M9W 5T6
Call Toll Free: 1-800-837-8961 Local: 416-798-1340
Fax: 416-798-1342 Email: sales@rfoil.com
Visit our Website: www.rfoil.com

Published: June 30, 2013




REFLECTIVE INSULATION (Single Layer)

TECHNICAL DATA

Product Description:

rFOIL™ Reflective Insulation is a single layer of polyethylene bubbles, sandwiched between two highly reflective surfaces. This product has been specifically designed for insulating commercial and residential building assemblies, reducing the amount of radiant heat transfer.

Adding rFOIL™ Reflective Bubble Insulation to your construction project improves the insulation value of the building envelope and significantly increases its energy efficiency. All products in this line are classified as Class 1 / Class A in accordance with the ASTM-E84-09 fire test standard. The product was mounted in accordance to ASTM-E2599-08

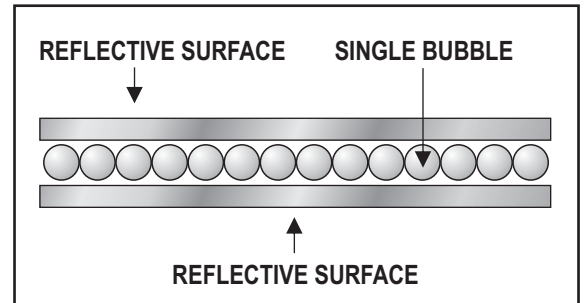

Stock Sizes Available (Rolls):

Size	48" X 125'	72" X 125'	72" X 102'
Part No.	2210-48-125	2210-72-125	2210-72-102

Features:

- Class 1 / Class A Fire Rating
- Unaffected by moisture & controls condensation
- Single bubble provides an effective thermal break
- 96% Reflectivity for optimal thermal performance
- Radiant barrier and vapor barrier all-in-one
- Available in Square Edge or Tab Two format

Applications:

- Crawlspace
- Basement Insulation
- Residential Insulation
- Cathedral Ceiling

Physical Properties	Test	Value
NOMINAL THICKNESS	—	3/16"
FIRE RATING	ASTM E84-09	CLASS 1 / CLASS A
FIRE RATING - FULL ROOM BURN	NFPA 286	PASSES
EMISSION	ASTM C1371-04A	0.04
REFLECTIVITY	ASTM E903	0.96
WATER VAPOR PERMEABILITY	ASTM E96	0.37 Perms
RESISTANCE TO FUNGI & BACTERIA	ASTM C1149	DOES NOT PROMOTE GROWTH
PLIABILITY	ASTM C1224-03	NO CRACKING
BLEEDING AND DELAMINATION	ASTM C1224-03	NO BLEEDING OR DELAMINATION
CORROSIVENESS	ASTM D3310-00	PASSES

Verified by



PATENTS

US Patent No.: 8,221,871
US Patent No.: 8,327,601
US Patent No.: 8,343,614

US Patent No.: 7,935,410
US Patent No.: 7,935,411

CDN Patent No.: 2,554,754
CDN Patent No.: 2,591,589



279 Humberline Drive Etobicoke, ON M9W 5T6
Call Toll Free: 1-800-837-8961 Local: 416-798-1340
Fax: 416-798-1342 Email: sales@rfoil.com
Visit our Website: www.rfoil.com



Published: June 30, 2013


POLY - REFLECTIVE INSULATION (Double Layer)

TECHNICAL DATA

Product Description:

rFOIL™ Reflective Bubble Insulation is a double layer of polyethylene bubbles, sandwiched between a highly reflective surface and a white polyethylene sheet. It is ideal for many residential and commercial building applications, including walls and ceilings.

Adding rFOIL™ Reflective Bubble Insulation to your construction project improves the insulation value of the building envelope and significantly increases its energy efficiency. As well, all products in this line are classified as Class 1 / Class A in accordance with the ASTM-E84-09 fire test standard. The product was mounted in accordance to ASTM-E2599-08.

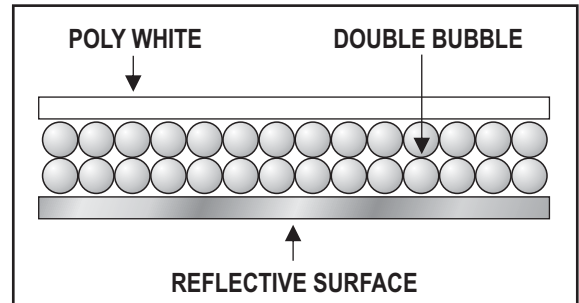

Stock Sizes Available (Rolls):

Size	48" X 125'	72" X 102'	72" X 125'
Part No.	2520-48-125	2520-72-102	2520-72-125

Features:

- UV (Ultra Violet) Resistant Facing
- 96% Reflectivity for optimal thermal performance
- Neat, washable white polyethylene surface / UV Protected
- Available in Square Edge, Quick-Seam or Tab Two
- Class 1 / Class A Fire Rating
- Radiant and vapor barrier all-in-one
- Double bubble provides an effective thermal break

Applications:

- Metal Buildings (roof, walls)
- Residential Wall Cavities
- Post Frame Buildings

Physical Properties	Test	Value
NOMINAL THICKNESS	—	5/16"
FIRE RATING	ASTM E84-09/ASTM E2599-08	CLASS 1 / CLASS A
EMISSIVITY	ASTM C1371-04A	0.04
REFLECTIVITY	ASTM E903	0.96
WATER VAPOR PERMEABILITY	ASTM E96	0.42 Perms
RESISTANCE TO FUNGI & BACTERIA	ASTM C1149	DOES NOT PROMOTE GROWTH
PLIABILITY	ASTM C1224-03	NO CRACKING
BLEEDING AND DELAMINATION	ASTM C1224-03	NO BLEEDING OR DELAMINATION
CORROSIVENESS	ASTM D3310-00	PASSES
UV TESTING	ASTM G155	90+% RETAINED RETENTION after 4000 hrs
FIRE RATING - FULL ROOM BURN	NFPA286	PASSES



PATENTS

US Patent No.: 8,221,871
 US Patent No.: 8,327,601
 US Patent No.: 8,343,614

US Patent No.: 7,935,410
 US Patent No.: 7,935,411

CDN Patent No.: 2,554,754
 CDN Patent No.: 2,591,589



279 Humberline Drive Etobicoke, ON M9W 5T6
 Call Toll Free: 1-800-837-8961 Local: 416-798-1340
 Fax: 416-798-1342 Email: sales@rfoil.com
Visit our Website: www.rfoil.com




POLY - REFLECTIVE INSULATION (Single Layer)

Product Description:

rFOIL™ Reflective Bubble Insulation is a single layer of polyethylene bubbles, sandwiched between a highly reflective surface and a white polyethylene sheet. It is ideal for many residential and commercial building applications, including walls and ceilings.

Adding rFOIL™ Reflective Bubble Insulation to your construction project improves the insulation value of the building envelope and significantly increases its energy efficiency. As well, all products in this line are classified as Class 1 / Class A in accordance with the ASTM-E84-09 fire test standard. The product was mounted in accordance to ASTM-E2599-08.

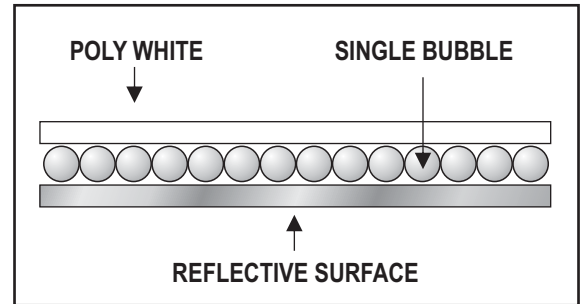

Stock Sizes Available (Rolls):

Size	48" X 125'	72" X 102'	72" X 125'
Part No.	2510-48-125	2510-72-102	2510-72-125

Features:

- UV (Ultra Violet) Resistant Facing
- 96% Reflectivity for optimal thermal performance
- Neat, washable white polyethylene surface / UV Protected
- Available in Square Edge, Quick-Seam or Tab Two
- Class 1 / Class A Fire Rating
- Radiant and vapor barrier all-in-one
- Single bubble provides an effective thermal break

Applications:

- Metal Buildings (roof, walls)
- Residential Wall Cavities
- Post Frame Buildings

Physical Properties	Test	Value
NOMINAL THICKNESS	—	3/16"
FIRE RATING	ASTM E84-09/ASTM E2599-08	CLASS 1 / CLASS A
EMISSIVITY	ASTM C1371-04A	0.04
REFLECTIVITY	ASTM E903	0.96
WATER VAPOR PERMEABILITY	ASTM E96	0.01 Perms
RESISTANCE TO FUNGI & BACTERIA	ASTM C1149	DOES NOT PROMOTE GROWTH
PLIABILITY	ASTM C1224-03	NO CRACKING
BLEEDING AND DELAMINATION	ASTM C1224-03	NO BLEEDING OR DELAMINATION
CORROSIVENESS	ASTM D3310-00	PASSES
UV TESTING	ASTM G155	90+% RETAINED RETENTION after 4000 hrs
FIRE RATING - FULL ROOM BURN	NFPA286	PASSES

Verified by



PATENTS

US Patent No.: 8,221,871
 US Patent No.: 8,327,601
 US Patent No.: 8,343,614

US Patent No.: 7,935,410
 US Patent No.: 7,935,411

CDN Patent No.: 2,554,754
 CDN Patent No.: 2,591,589



279 Humberline Drive Etobicoke, ON M9W 5T6
 Call Toll Free: 1-800-837-8961 Local: 416-798-1340
 Fax: 416-798-1342 Email: sales@rfoil.com
Visit our Website: www.rfoil.com



Published: June 30, 2013


TECHNICAL DATA

ULTRA MBI - WHITE METAL BUILDING INSULATION (Double Layer)

Product Description:

rFOIL™ Ultra MBI Metal Building Reflective Bubble Insulation is a double layer of polyethylene bubbles, sandwiched between a highly reflective surface and a white polyethylene sheet. It is ideal for many residential and commercial building applications, including walls and ceilings.

Adding rFOIL™ Ultra MBI Reflective Bubble Insulation to your construction project improves the insulation value of the building envelope and significantly increases its energy efficiency. As well, all products in this line are classified as Class 1 / Class A in accordance with the ASTM-E84-09 fire test standard. The product was mounted in accordance to ASTM-E2599-08.

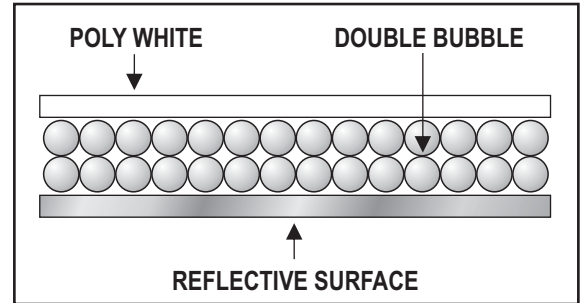

Stock Sizes Available (Rolls):

Size	48" X 125'	72" X 102'	72" X 125'
Part No.	2620-48-125	2620-72-102	2620-72-125

Features:

- UV (Ultra Violet) Resistant Facing
- 96% Reflectivity for optimal thermal performance
- Neat, washable white polyethylene surface / UV Protected
- Available in Square Edge, Quick-Seam or Tab Two
- Class 1 / Class A Fire Rating
- Radiant and vapor barrier all-in-one
- Double bubble provides an effective thermal break

Applications:

- Metal Buildings (roof, walls)
- Residential Wall Cavities
- Post Frame Buildings

Physical Properties	Test	Value
NOMINAL THICKNESS	—	5/16"
FIRE RATING	ASTM E84-09/ASTM E2599-08	CLASS 1 / CLASS A
EMISSION	ASTM C1371-04A	0.04
REFLECTIVITY	ASTM E903	0.96
WATER VAPOR PERMEABILITY	ASTM E96	0.42 Perms
RESISTANCE TO FUNGI & BACTERIA	ASTM C1149	DOES NOT PROMOTE GROWTH
PLIABILITY	ASTM C1224-03	NO CRACKING
BLEEDING AND DELAMINATION	ASTM C1224-03	NO BLEEDING OR DELAMINATION
CORROSIVENESS	ASTM D3310-00	PASSES
UV TESTING	ASTM G155	90+% RETAINED RETENTION after 4000 hrs
FIRE RATING - FULL ROOM BURN	NFPA 286	PASSES

Verified by



PATENTS

US Patent No.: 8,221,871
US Patent No.: 8,327,601
US Patent No.: 8,343,614

US Patent No.: 7,935,410
US Patent No.: 7,935,411

CDN Patent No.: 2,554,754
CDN Patent No.: 2,591,589



279 Humberline Drive Etobicoke, ON M9W 5T6
Call Toll Free: 1-800-837-8961 Local: 416-798-1340
Fax: 416-798-1342 Email: sales@rfoil.com
Visit our Website: www.rfoil.com

Published: June 30, 2013




ULTRA MBI - WHITE METAL BUILDING INSULATION (Single Layer)

Product Description:

rFOIL™ Ultra MBI Metal Building Reflective Bubble Insulation is a single layer of polyethylene bubbles, sandwiched between a highly reflective surface and a white polyethylene sheet. It is ideal for many residential and commercial building applications, including walls and ceilings.

Adding rFOIL™ Ultra MBI Reflective Bubble Insulation to your construction project improves the insulation value of the building envelope and significantly increases its energy efficiency. As well, all products in this line are classified as Class 1 / Class A in accordance with the ASTM-E84-09 fire test standard. The product was mounted in accordance to ASTM-E2599-08.

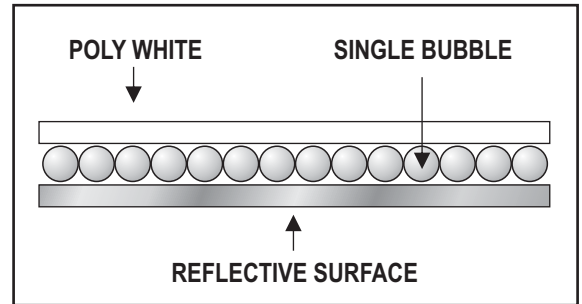

Stock Sizes Available (Rolls):

Size	48" X 125'	72" X 102'	72" X 125'
Part No.	2610-48-125	2610-72-102	2610-72-125

Features:

- UV (Ultra Violet) Resistant Facing
- 96% Reflectivity for optimal thermal performance
- Neat, washable white polyethylene surface / UV Protected
- Available in Square Edge, Quick-Seam or Tab Two
- Class 1 / Class A Fire Rating
- Radiant and vapor barrier all-in-one
- Single bubble provides an effective thermal break

Applications:

- Metal Buildings (roof, walls)
- Residential Wall Cavities
- Post Frame Buildings

Physical Properties	Test	Value
NOMINAL THICKNESS	—	3/16"
FIRE RATING	ASTM E84-09/ASTM E2599-08	CLASS 1 / CLASS A
EMISSIVITY	ASTM C1371-04A	0.04
REFLECTIVITY	ASTM E903	0.96
WATER VAPOR PERMEABILITY	ASTM E96	0.01 Perms
RESISTANCE TO FUNGI & BACTERIA	ASTM C1149	DOES NOT PROMOTE GROWTH
PLIABILITY	ASTM C1224-03	NO CRACKING
BLEEDING AND DELAMINATION	ASTM C1224-03	NO BLEEDING OR DELAMINATION
CORROSIVENESS	ASTM D3310-00	PASSES
UV TESTING	ASTM G155	90+% RETAINED RETENTION after 4000 hrs
FIRE RATING - FULL ROOM BURN	NFPA 286	PASSES

Verified by



REFLECTIVE INSULATION MANUFACTURERS ASSOCIATION
US-006-10

PATENTS

US Patent No.: 8,221,871	US Patent No.: 7,935,410	CDN Patent No.: 2,554,754
US Patent No.: 8,327,601	US Patent No.: 7,935,411	CDN Patent No.: 2,591,589
US Patent No.: 8,343,614		



279 Humberline Drive Etobicoke, ON M9W 5T6
 Call Toll Free: 1-800-837-8961 Local: 416-798-1340
 Fax: 416-798-1342 Email: sales@rfoil.com
Visit our Website: www.rfoil.com



TECHNICAL DATA